

220 HP

SD22W

One tough dozer for mining and more

- ▶ Engine model: Cummins NT855-C280S10
- ▶ Rated power: 162 kW/1800 rpm
- ▶ Operating weight: 23.44 t

Product features

This version of the SD22W has a reinforced undercarriage, arms and blade for the toughest of large obstacle jobs, such as large rocks and boulders. The blade is thicker and the arms plated for greater strength and durability. It is well-suited for heavy mining applications. It is one of Shantui's top sellers in Africa, where large-scale mining is prevalent.



Address: Unit 1 Jurgens Street Jet Park Ext 5- 1619

Tel: +27 (0) 11 390 8160

Website: <http://en.shantui.com>

SHANTUI
VALUE THAT WORKS

Fuelled By

EVERSTAR
Industries







220 HP

SD22W


Technical specifications:

Blade Type	Straight-tilt
Min. ground clearance:	405 mm
Ground pressure:	0.077 MPa
Minimum turning radius:	3.3 m
Gradeability:	30°
Track gauge:	2000 mm

SD22W

	ENGINE	Model & type	Cummins NT855-C280S10; In-line, water-cooled 4-cycle, overhead valve direct injection, turbocharged diesel		
		Rated power	162 kW		
		Number of cylinders	6-139.7 x 152.4 mm (bore x stroke)		
		Piston displacement	14.01 L		
		Min. fuel consumption	205 g/kW-h		
		Maximum torque	1030 N·m@1250rpm		
	POWER TRANSMISSION SYSTEM	Torque converter	3-element, 1 stage, 1 phase		
		Transmission	Planetary gear, multi-disc clutch, hydraulically connected, forced lubrication		
		Main drive	Spiral bevel gear, splash lubrication, single-stage speed reduction		
		Steering clutch	Wet, multi-disc, spring loaded, hydraulically separated, hydraulic control		
		Steering brake	Wet, floating, direct on-off hydraulic inter-linking operation		
		Final drive	2-stage speed reduction of spur gear, splash lubrication		
	TRAVEL SPEED	Gear	1st	2nd	3rd
		Forward	0~3.6 km/h	0~6.5 km/h	0~11.2 km/h
		Reverse	0~4.3 km/h	0~7.7 km/h	0~13.2 km/h
	UNDERCARRIAGE SYSTEM	Type	Swing type of sprayed beam, suspended structure of equalizer bar		
		Carrier rollers	2 each side		
		Track rollers	8 each side		
		Track type	Assembled, single-grouser		
		Width of track shoes	560 mm		
		Pitch	216 mm		
	HYDRAULIC SYSTEM	Maximum pressure	14 MPa		
		Pump type	Gear pump		
		Discharge	262 L/min		
		Bore of working cylinder × no.	120 mm × 2		
	BLADE	Blade type	Straight-tilt blade		
		Dozing capacity	6.8 m³		
		Efficiency (Theoretical value 40 m)	330 m³/h		
		Blade width	3725 mm		
		Blade height	1315 mm		
		Maximum drop below ground	540 mm		
		Maximum tilt adjustment	>735 mm		
		Weight of blade	3630 kg		

OVERALL DIMENSIONS Straight-tilt blade

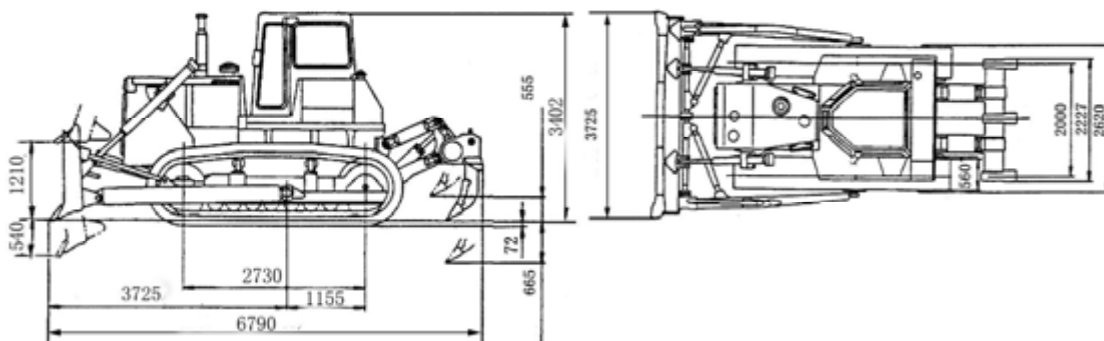

THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.